

ROHS COMPLIANT

1.27mm Pin Header Single Row Double Plastic Straight Type

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHCS04 - X - X - S - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
01 To 50③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin④ Connector Type
S: Single⑤ Pin Length:
A+B+C

Please mark the desired length in the A/B

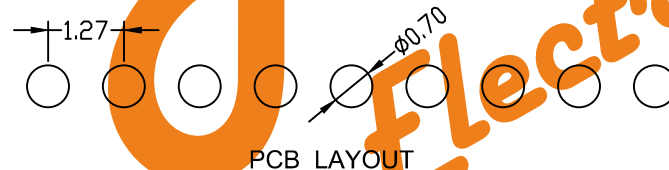
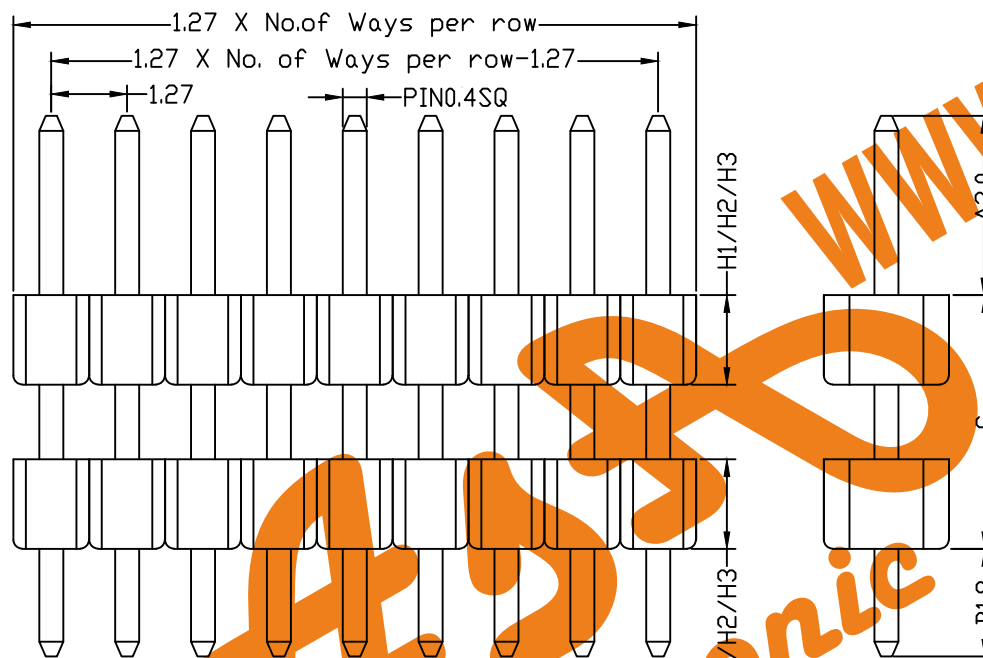
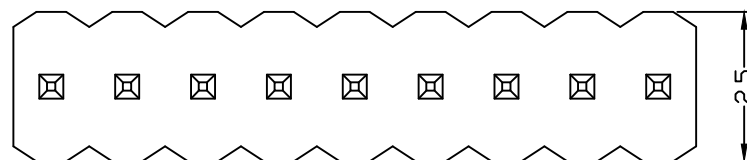
⑥ Insulator Material

B: PA6T
C: LCP
D: PA46

⑦ Packing

A: Tray
B: Bag
T: Tube

⑧ Plastic High

H1: 0.65mm
H2: 1.5mm
H3: 2.0mm

PCB LAYOUT

A	B	C
3.0	1.8	
Optional		


Unless Otherwise specified tolerance

X: ±0.35
X.X: ±0.25
X.XX: ±0.20
X.XXX: ±0.15

SCALE:
As ShownUNIT:
mm

DRAWN: junfon H

CHECKED: YANG



AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:
1.27mm Pin Header Single Row Double Plastic Straight Type

DRAWING NO: PHCS04-XXSXXXX

PRODUCT NO: PHCS04-XXSXXXX

Add option of plating

10/8/1

DESCRIPTION

DATE

ROHS COMPLIANT

1.27mm Pin Header Single Row Double Plastic Straight Type

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 5000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHCS04 - X - X - S - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
01 To 50③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin④ Connector Type
S: Single⑤ Pin Length:
A+B+C

Please mark the desired length in the A/B

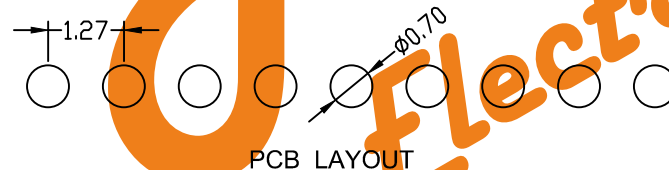
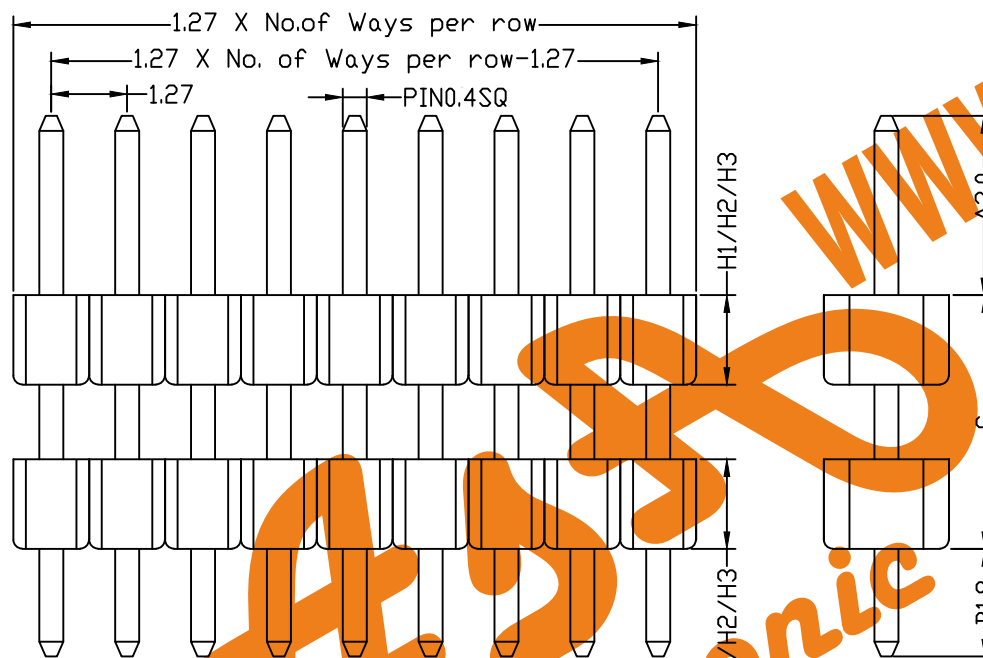
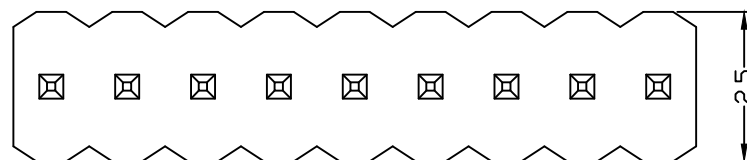
⑥ Insulator Material

B: PA6T
C: LCP
D: PA46

⑦ Packing

A: Tray
B: Bag
T: Tube

⑧ Plastic High

H1: 0.65mm
H2: 1.5mm
H3: 2.0mm

PCB LAYOUT

A	B	C
3.0	1.8	
Optional		


Unless Otherwise specified tolerance

X: ±0.35
X.X: ±0.25
X.XX: ±0.20
X.XXX: ±0.15

SCALE:
As ShownUNIT:
mm

DRAWN: junfon H

CHECKED: YANG



AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:
1.27mm Pin Header Single Row Double Plastic Straight Type

DRAWING NO: PHCS04-XXSXXXX

PRODUCT NO: PHCS04-XXSXXXX

Add option of plating

10/8/1

DESCRIPTION

DATE